

44040 / 44050 / 44060 Heavy Duty 4-Post Lift

- 40,000 - 60,000 lb. lifting capacity for heavy commercial truck and transit vehicles
- Heavy duty, high tensile strength leaf chain and sealed roller bearings for maximum reliability
- Variable-synchro power system with dual hydraulic lift cylinders provide the ability to variably or simultaneously raise the front or rear lift suspension, providing a stable platform when lifting vehicles with heavier front or rear axles
- Velocity fused redundant hydraulic safety system
- Single point air actuated lock release system allows technician to disengage all column locks simultaneously
- Diamond plate anti-skid runways and heavy duty fixed approach ramps for positive vehicle traction and long lasting durability
- Adjustable runways accommodate a variety of tread and axle widths
- Built-in runway rail system for optional convenience accessories like rolling jacks and sliding oil drain pan

Model#: 44060
Heavy-Duty 4-Post Lift
60,000 lb. capacity




Anti-skid diamond plate ramps are bolted down for safe and easy drive-on

Independent control console provides safe and convenient access to the lifts' power controls - features variable-synchro power system to raise and lower the front or rear suspension either simultaneously or independently, dual pressure gauges and single point air lock release button



10 level twin ladder lock positions provide a comfortable working height for a variety of service work on a variety of vehicles

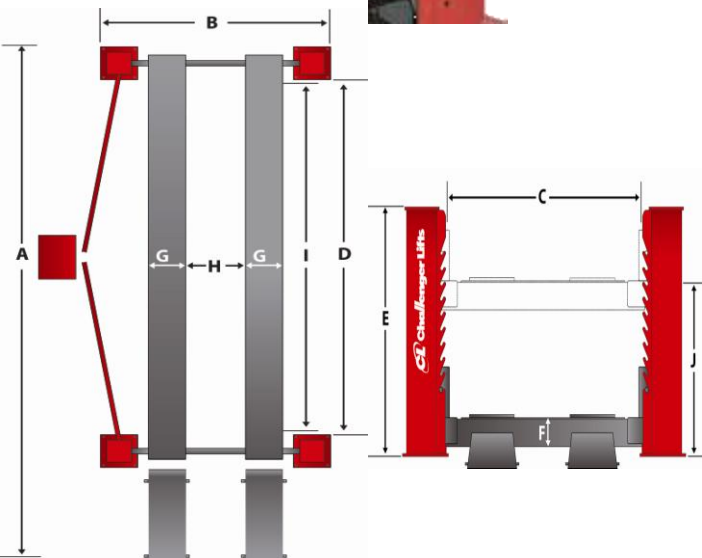

Model Number	44040	44040E	44040X	44050	44050E	44050X	44060	44060E	44060X
Lifting Capacity	40,000 lbs			50,000 lb.			60,000 lb.		
A Length Overall	36'	41'	46'	36'	41'	46'	36'	41'	46'
B Width Overall	17' 1 1/4"			17' 1 1/4"			17' 1 1/4"		
C Inside Columns	144"			144"			144"		
D Between Columns	290"	350"	410"	290"	350"	410"	290"	350"	410"
E Height of Columns	92"			92"			92"		
F Height of Runways	14"			14"			14"		
G Width of Runways	32"			32"			32"		
H Between Runways	36" - 58"			36" - 58"			36" - 58"		
I Max. Wheelbase	310"	370"	430"	310"	370"	430"	310"	370"	430"
J Rise Height	73"			73"			73"		
Motor	10 HP			15 HP			15 HP		
Voltage (Three Phase)	230v - 460v			230v - 460v			230v - 460v		
Speed of Rise	70 sec.			75 sec.			75 sec.		
Amps	30			30			30		

Call 918-258-8492 to place your Order Today!